


DXC Module D8HS

8-Channel High-Speed Data Module

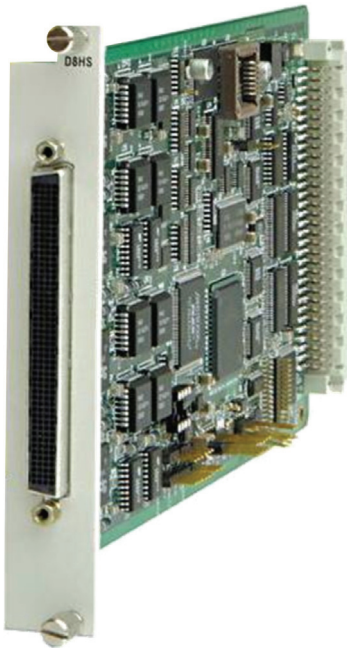

- Eight high-speed data channels
- RS-422, RS-232, V.35, or X.21 serial interfaces on any channel
- Programmable data rates: 56 to 1536 kbps for T1 and 64 to 2048 kbps for E1
- User-assigned or automatically selected timeslots on the E1 or T1 links
- Timeslots cross-connect with any other DXC-8R/10A/30 module

D8HS is an $n \times 56/64$ kbps data module that provides eight synchronous high-speed data channels.

The module is supported by DXC systems with DCL.3 common logic, from version 9.0 and onwards.

Each synchronous data channel operates at data rates of $n \times 56$ or $n \times 64$ kbps (where $n = 1$ to 24 for T1 and 1 to 32 for E1 links). Channel data rates and all operating parameters are software selectable.

Timeslots used on the E1 or T1 link can be user-assigned or automatically selected.

An external clock can be selected as the source for system timing. Connection to national digital lines (such as DDS or Kilostream) is supported.

Each channel recognizes four control signals locally.

Powerful testing capabilities and self-diagnostics upon power-up reduce downtime to a minimum.

D8HS is supplied with a 200-pin high-density connector. To convert to the following interfaces, splitter cables are available from RAD (see *Ordering*):
 $8 \times$ RS-422, $8 \times$ V.35, $8 \times$ X.21,
 $8 \times$ RS-232.

To provide buffered retiming of the received data, the user can select timing modes to configure each channel as DCE, DTE1 and DTE2.

Interface selection is software controlled.

The D8HS module occupies one I/O slot in a DXC-8R, DXC-10A or DXC-30 chassis.

Eight high-speed
synchronous data
channels for the DXC
family of modular
cross-connects

D8HS

8-Channel High-Speed Data Module

Specifications

Channels per Module

8

Interface and Connectors

Via splitter cables:

8 × RS-422

8 × RS-232

8 × V.35

8 × X.21

Clock Modes

DCE: Transmit and Receive clocks to synchronous DTE device (for RS-422, V.35, X.21 and RS-232)

DTE1: External Transmit clock from synchronous DTE device, and Receive clock to synchronous DTE device (for RS-422, V.35)

DTE2: External Transmit and Receive clocks from synchronous DTE device (for RS-422 only)

Data Rates

Synchronous $n \times 56$ kbps or $n \times 64$ kbps

For T1: $n = 1$ to 24

For E1: $n = 1$ to 32

Control Signals

CTS follows RTS or is constantly ON, software selectable

DSR ON, unless in Test mode

DCD constantly ON, unless in RED ALARM

Diagnostics

Local loopback

Remote loopback

Internal BERT

Auto self-test

Configuration

Programmable through the DXC management system

Power Consumption





9.3W

Physical

Occupies a single slot in a DXC-8R, DXC-10A or DXC-30 chassis

For comparison of DXC chassis, see *Table 1*. For the list of DXC I/O modules, refer to the DXC-8R/10A/30 data sheet.

Table 1. DXC Chassis Comparison Table

				
Feature	DXC-8R	DXC-10A	DXC-30	DXC-100*
Height	1U	1U	3U	6U per nest
Maximum number of ports	32	40	120	688 (8 nests)
Number of I/O slots	4	5	15	86 (8 nests)
System redundancy	Built-in	None	Optional	Optional
E1, T1, E3, T3, STM-1 modules	✓	✓	✓	✓
XDSL, inverse multiplexing modules	✓	✓	✓	-
$n \times 56/64$ kbps modules	✓	✓	✓	✓
Router, OC-3 modules	-	-	-	✓
ASCII, SNMP, RADview management	✓	✓	✓	✓

**The DXC-8R/10A/30 modules and DXC-100 modules are not interchangeable.*

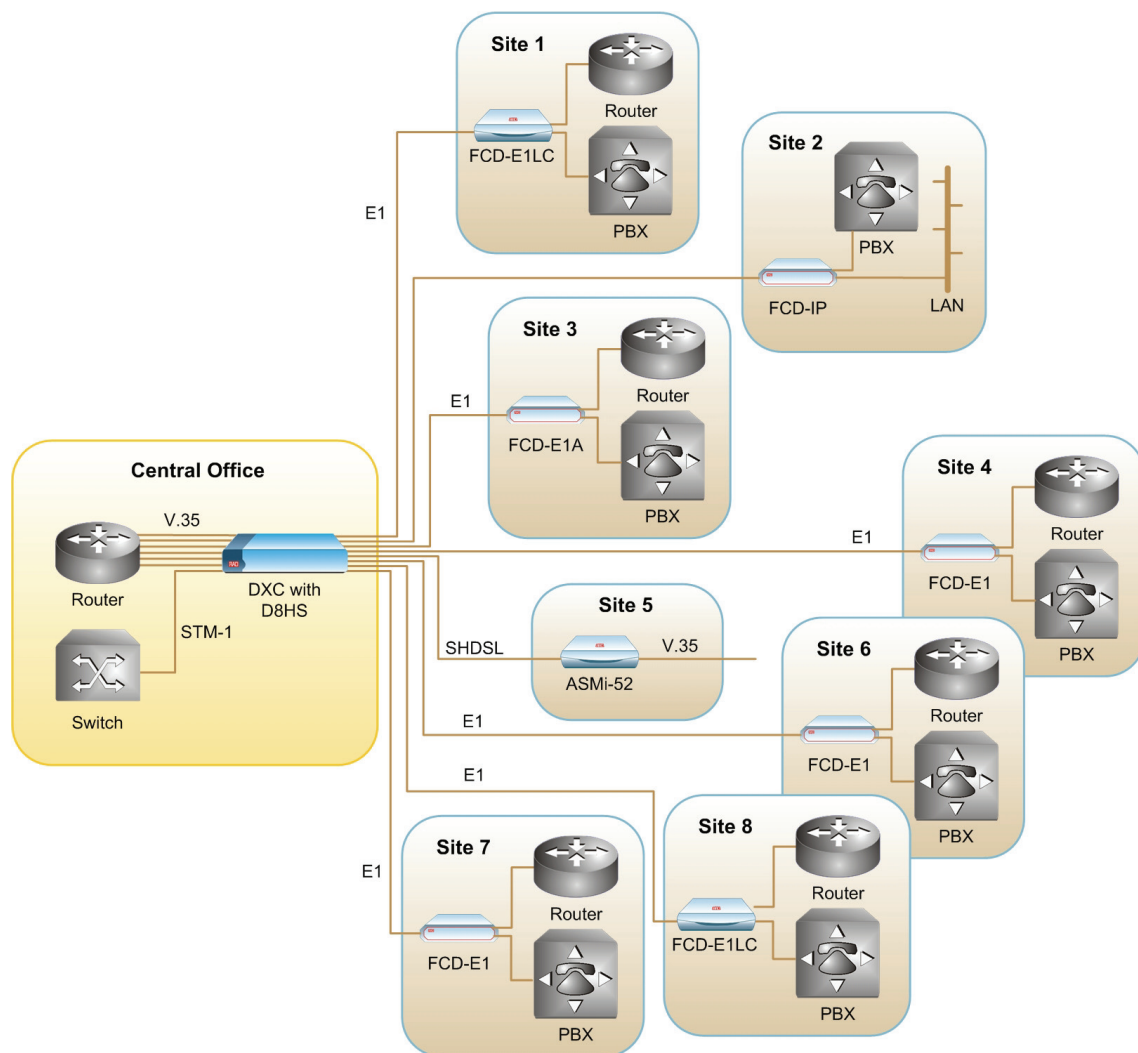


Figure 1. Transferring High Speed Data over Multiple E1/T1 Lines

D8HS

8-Channel High-Speed Data Module

Ordering

DXC-M-8HS

OPTIONAL ACCESSORIES

CBL-D8HS-RS530

Splitter cable to convert the 200-pin D8HS connector to eight DB-25 RS-422 and RS-232 connectors

CBL-D8HS-V35/M

Splitter cable to convert the 200-pin D8HS connector to eight 34-pin male V.35 connectors

CBL-D8HS-V35/F

Splitter cable to convert the 200-pin D8HS connector to eight 34-pin female V.35 connectors

CBL-D8HS-X21

Splitter cable to convert the 200-pin D8HS connector to eight DB-15 X.21 connectors

772-134-04/10 Specifications are subject to change without prior notice. © 1988-2010 RAD Data Communications Ltd. The RAD name, logo, logotype, and the terms EtherAccess, TDMoIP and TDMoIP Driven, and the product names Optimux and IPrnux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

International Headquarters

24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

North America Headquarters

900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-5291100
Toll free 1-800-4447234
Fax 201-5295777
E-mail market@radusa.com

www.rad.com

Order this publication by Catalog No. 803527
Order from: Cutter Networks Ph: 727-398-5252 / Fax: 727-397-9610



data communications

The Access Company

www.bestdatasource.com