

BE-1



Coax to Twisted Pair Converter for E1



FEATURES

- Conversion between coax interface and twisted pairs for E1 applications (2.048 Mbps)
- Enables standard ISDN primary rate installation over existing coax cables
- No AC or DC power required
- Insensitive to signal direction
- Immediate installation
- Miniature, lightweight Balun

DESCRIPTION

- The BE-1 Balun (coax to twisted pair converter) enables any E1 equipment with coax interface to operate over two twisted pairs (4-wire interface), as shown in *Figure 1*.
- Two BE-1 units back-to-back allow 4-wire ISDN equipment to operate over existing coax cables (see *Figure 2*).
- BE-1 is insensitive to the direction of the signal, allowing transmit and receive lines to be reversed without affecting operation.
- BE-1 is a miniature, lightweight Balun. It operates without AC or DC power and provides up to 1000V isolation voltage for protection against AC and DC overvoltage on the line.

BE-1

Coax to Twisted Pair Converter for E1

SPECIFICATIONS

- **Standards**

Supports ITU G.703 pulse mask on unbalanced and balanced sides

- **Data rate: 2.048 Mbps**

- **Unbalanced Interface**

Line impedance:

75Ω, unbalanced

Connectors:

2 x BNC (female or male)
(see *Ordering*)

- **Balanced Interface**

Line impedance:

120Ω, balanced

Connector:

RJ-45, 8-pin

- **Pinout**

RJ-45	BNC-1	GND	BNC-2
1			Shield
2			Core
3,6		GND	
4	Shield		
5	Core		
7,8	(Not connected)		

- **Power**

Operates without external power supply

- **Physical**

Length: 50mm/ 2.0 in

Width: 50mm/ 2.0 in

Height: 24mm/ 0.9 in

Weight: 50g / 1.8 oz

- **Environment**

Temperature:

0-50°C / 32-122°F

Humidity:

up to 90%, non-condensing

ORDERING

BE-1/M for BNC male connectors

BE-1/F for BNC female connectors

APPLICATION

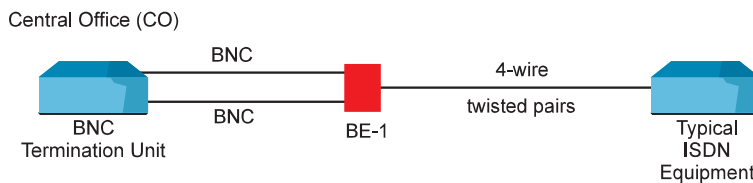


Figure 1. ISDN Primary Rate from Carrier

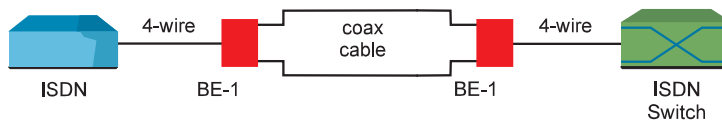


Figure 2. ISDN over Existing Coax Cables

RAD

data communications

<http://www.rad.com>

- **Corporate Headquarters**

12 Hanechoshet Street
Tel Aviv 69710, Israel
Tel: (972) 3-6458181
Fax: (972) 3-6498250, 6474436
Email: rad@radmail.rad.co.il

- **U.S. Main Office**

900 Corporate Drive
Mahwah, NJ 07430
Tel: (201) 529-1100
Fax: (201) 529-5777
Email: market@radusa.com

271-100-03/98