

ASM-10/8

Sync/Async Modem



Multi-rate, long-range,
synchronous/
asynchronous modem

- Synchronous or asynchronous transmission format
- Selectable data rates up to 19.2 kbps
- Extended range up to 28 km (17.5 miles) over 24 AWG copper line
- V.54 diagnostics
- Remote unit power failure detection

The ASM-10/8 long range modem operates full or half duplex with synchronous or asynchronous transmission format over unconditioned dedicated lines.

ASM-10/8 has an extended range of up to 28 km (17.5 miles) over 24 AWG copper lines and operates at eight selectable data rates of up to 19.2 kbps.

The modem uses conditioned differential diphase modulation (EUROCOM Std. D1), which provides immunity to background noise and eliminates normal line distortion for efficient transfer of serial data over twisted pair cable.



ASM-10/8

Sync/Async Modem

ASM-10/8 is coupled to the dedicated line through isolation transformers which, in conjunction with other circuitry, protect against AC or DC overvoltage. The protection circuitry enables operation even when DC voltage is connected to the line.

Transmit level and impedance are independently selectable. Transmit timing can be provided internally, or can be derived externally from the data terminal or from the receive signal. Receive timing is regenerated from the data. Line communication is always synchronous. When set to async mode, ASM-10/8 performs async-to-sync conversion in compliance with the ITU V.14 standard.

ASM-10/8 features V.54 diagnostic capabilities for performing local analog loopback and local/ remote digital loopbacks. The operator at either end of the line may test both modems and the line when in the digital loopback mode. The loopback is controlled by either front panel pushbuttons or via Pins 18 and 21 of the V.24/RS-232 interface. A selectable option allows insertion of a delay into the data stream so that the V.54 loops are not carried across the network.

ASM-10/8 can detect and indicate power failure on the remote unit. The front panel RPF indicator lights if remote power failure occurs.

ASM-10/8 is available as a desktop unit in a plastic enclosure.

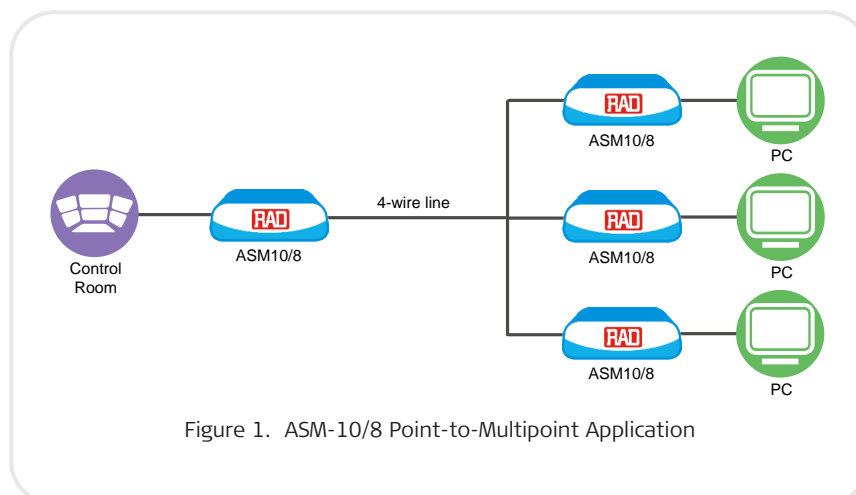


Figure 1. ASM-10/8 Point-to-Multipoint Application

Specifications

LINE INTERFACE

Line Type

Unloaded twisted pair 19 to 26 AWG
2-wire for half duplex
4-wire for full duplex

Range

(see Table 1)

Transmit Output Level

0, -3, -6, -9 dBm, jumper-selectable

Impedance

150, 300, 600Ω, jumper-selectable

Return loss

Greater than 15 dB

Carrier

Controlled by RTS or constantly ON

Modulation

- Differential diphas
- Eurocom Std. D1

DIGITAL INTERFACE

Type

EIA RS-232-C/ITU V.24

Data Rates

Sync and async, 1.2, 2.4, 3.6, 4.8, 7.2, 9.6, 14.4, 19.2 kbps, jumper-selectable

RTS/CTS delay

0, 8 or 64 msec, jumper-selectable

DIAGNOSTICS

Complies with V.54 standard

Digital loopback

- Local (DIG), activated by manual pushbutton
- Remote (REM), activated by manual pushbutton or by DTE interface signal, Pin 21

Analog loopback

Local (ANA), activated by manual pushbutton or by DTE interface signal, Pin 18

TIMING

Receive Clock Signal

Derived from CDP receive signal

Transmit Clock Signal

Derived from 3 alternative sources:

- Internal
- External from terminal, via Pin 24
- Loop clock, derived from receive signal, looped back as transmit clock.

GENERAL

Indicators

TD – Transmit Data

RD – Receive Data

RTS – Request to Send

DCD – Data Carrier Detect

TEST – Test

PWR – Power

RPF – Remote Power Fail

Physical

Height: 44 mm (1.7 in)

Width: 215 mm (8.5 in)

Depth: 243 mm (9.5 in)

Weight: 0.96 kg (2.1 lb)

Power Supply

115 VAC ($\pm 10\%$)

230 VAC ($\pm 10\%$)

47 to 63 Hz

Power Consumption

3W

Environment

Operating temperature: 0 °C to 50 °C
(32 °F to 122 °F)

Humidity: Up to 90%, non-condensing

Table 1. Approximate ASM-10/8 Range

Data Rate	19 AWG (0.9 mm)		24 AWG (0.5 mm)		26 AWG (0.4 mm)	
[kbps]	[km]	[miles]	[km]	[miles]	[km]	[miles]
19.2	22.5	14.0	10.0	6.2	7.5	4.7
14.0	24.5	15.3	11.0	6.9	8.2	5.1
9.6	29.0	18.1	13.0	8.1	9.5	5.9
7.2	33.0	20.5	15.0	9.4	11.0	6.9
4.8	36.0	22.5	16.0	10.0	12.0	7.5
3.6	40.0	25.0	18.0	11.2	13.5	8.4
2.4	47.0	29.3	21.0	13.1	15.7	9.8
1.2	55.0	34.3	28.0	17.5	21.0	13.1

ASM-10/8

Sync/Async Modem

Ordering

ASM-10/8/SA/*/+

Legend

- * Power supply type
 - 115** 115 VAC
 - 230** 230 VAC
- + Remote power fail indication
(Default: without RPF indication)
 - RPF** Remote power fail indication

600-100-11/12 Specifications are subject to change without prior notice. © 1988-2012 RAD Data Communications Ltd. The RAD name, logo, logo type, and the terms EtherAccess, TDMoIP and TDMoIP Driven, and the product names Optimux and Ipmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

International Headquarters
24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

North America Headquarters
900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-5291100
Toll free 1-800-4447234
Fax 201-5295777
E-mail market@radusa.com

www.rad.com

Order this publication by Catalog No. 800170



data communications
The Access Company