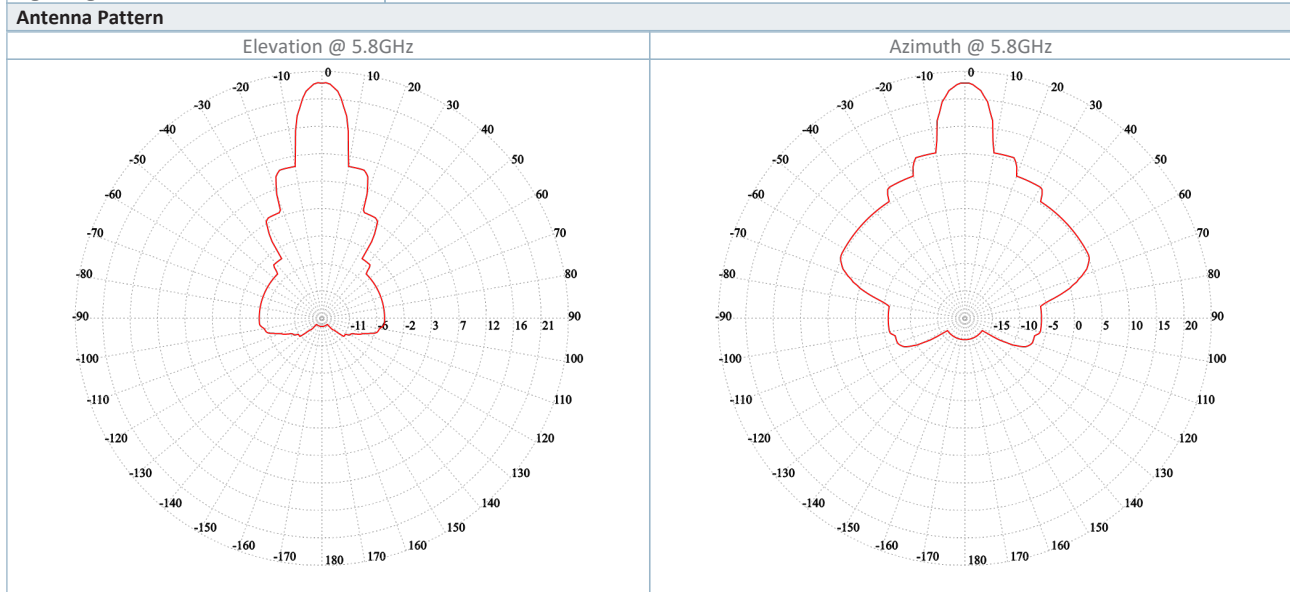


SU/F58F/100M/INT

Subscriber Unit (Airmux-5000/SU/F58F/100M/INT)

Integrated Antenna	
Gain	23 dBi
VSWR	1.5 :1 (typ)
3 dB Azimuth Beamwidth	10 Deg. (typ)
Polarization	Dual Linear (Vertical and Horizontal)
Sidelobes Level	ESTI EN 302 326-3 V1.1.2 DN3
Cross Polarization	ESTI EN 302 326-3 V1.1.2 DN3
F/B Ratio	-30 dB
Port To Port Isolation	30 dB (max)
Lightning Protection	DC Grounded

**Ordering****Airmux-5000/SU/F58F/100M/INT**

5A0 ODU, with an integrated antenna, supporting multi frequency bands at 5.x GHz, factory default 5.8 GHz FCC/IC.