

ETX-2i-100G

High Speed Carrier Ethernet Demarcation and Aggregation



- High Speed service aggregation platform addresses the ever increasing need for more high-bandwidth services at the network edge.
- Capable of delivering up to 100GbE to Business customers and Data Center Connectivity applications.
- The 100G device provides a small footprint (1RU, 19") and low-power consumption solution means to address today's key network challenges.

The global proliferation of mobile, video, and cloud applications creates an increasing demand for high-bandwidth access, generating new opportunities for communication service providers.

ETX-2i-100G is designed to address the demand for demarcation and aggregation of agile, reliable, and assurable services at data rates that exceed 10Gbps.

ETX-2i-100G is capable of delivering up to 100 GbE services using a mix of 10GbE and 100GbE interfaces, while offering Carrier Ethernet 2.0 compliant service models, service monitoring, flexibility, and manageability.

FLEXIBLE SERVICE DELIVERY AND ASSURANCE UP TO 100G

ETX-2i-100G enables operators to deliver service level guarantees, by supporting multi-layer diagnostics, fine-grained SLA enforcement, and accurate performance monitoring. Built-in service activation testers support verifying end-to-end network performance.

ETX-2i-100G best in class traffic management capabilities include an advanced classification engine, VLAN manipulation, and sophisticated service shaping that provide operators full flexibility and control over traffic flows. ETX-2i-100G support for hierarchical QoS enables delivery of multiple prioritized service types along with best effort services, while efficiently utilizing available network bandwidth.

SDN READY MANAGEMENT AND CONTROL

ETX-2i-100G leverages RAD's field-proven, carrier grade operating system - integrated in the entire ETX-2 family - to provide a familiar and uniform interface for provisioning, administration, and maintenance operations.

ETX-2i-100G can be managed using RADview, RAD's carrier-class NMS, or any SNMP-based management system. The device supports a variety of access protocols, including CLI over Telnet, SNMPv3, and TFTP, with a comprehensive security suite.

ETX-2i-100G implements RAD's unique ZTP process, allowing devices to onboard automatically and securely without human intervention, and enabling operators to provision services easily and reliably.

ETX-2i-100G is delivered ready for SDN transformation with comprehensive support for the NETCONF/YANG protocol, enabling operators to utilize modern network service orchestrators.

FEATURES AND BENEFITS

- Three 100GbE plus ten 1/10GbE interfaces (SFP+)
- MEF-compliant service topologies, including E-Line, E-LAN, E-Tree, E-Access, and E-Transit services
- ITU-T G.8031 Ethernet linear protection, with sub-50 ms restoration time
- Advanced QoS, with hierarchical policing and bandwidth shaping per EVC and EVC.CoS
- Accurate, scalable hardware-based OAM and PM (ITU-T Y.1731 and TWAMP)
- ITU-T Y.1564 service activation testing at wirespeed
- Advanced management capabilities, fully compatible with the ETX-2 family and supported by RADview EMS/NMS and Performance Monitoring portal
- NETCONF/YANG support for intelligent service orchestration
- Zero touch provisioning (ZTP) for scalable, secure, and rapid service rollout
- Redundant, hot-swappable AC or DC power supply
- Low power consumption for cost effective operation
- 19" 1RU form factor

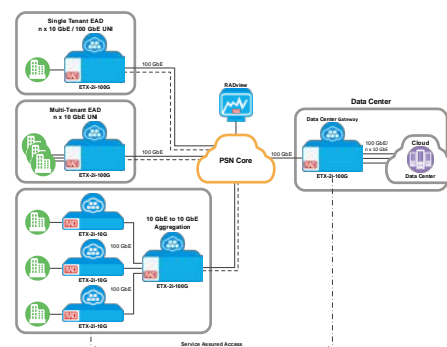


Figure 1 - ETX-2i-100G Demarcation and Aggregation Applications



ETX-2i-100G

High Speed Carrier Ethernet Demarcation and Aggregation

Specifications

INTERFACES

Ethernet Ports

Three 100GbE (QSFP28)

Ten 1/10GbE (SFP+)

Management Port

Type: 10/100/1000BaseT

Connector: RJ-45

Control Port

Interface: V.24/RS-232 DCE

Connector: Mini USB

Format: Asynchronous

Data rate: 9.6, 19.2, or 115.2 kbps

BRIDGE

Max. Frame Size

12,288 bytes

Compliance

802.1D, 802.1Q, 802.1ad

Mode

VLAN-aware, VLAN-unaware

VLAN Editing

Inner/outer VLAN editing per VLAN and p-bit values

TRAFFIC MANAGEMENT

Classification

Per port, outer VLAN or outer + inner VLAN, PCP, TOS/DSCP, EtherType, IP/MAC source/destination address

Policing

Color-aware/unaware dual token bucket with user-configurable CIR, CBS and EIR, EBS

Scheduling

Eight CoS per EVC scheduling elements

Strict Priority (SP) and Weighted Fair Queue (WFQ)

Shaping

Per port, per EVC, or per EVC.CoS

OAM AND DIAGNOSTICS

IEEE 802.1ag Connectivity Fault Management (CFM)

IEEE 802.3ah EFM Link-fault OAM

ITU-T Y.1731 PM (SLM; DM)

RFC 5618 TWAMP responder and receiver

TWAMP sender

Service Activation Tests

RFC-2544: 8 built-in testers

ITU-T Y.1564: 8 built-in testers

Loopback Tests

Non-disruptive loopback per flow, with MAC/IP address swap

Loopbacks at Ethernet port level

ICMP Echo

Over L2 and L3 services

Tests IP connectivity (PING)

RESILIENCY

Ethernet Path Protection

G.8031 linear 1:1 protection

Link Aggregation

Load balancing LAG with up to 4 ports in a LAG group (on 10G ports)

MANAGEMENT

Management Options

Local management via LAN port or serial port

Remote management via in-band VLAN

Password-protected access with authorization levels

Protocols and Security

Secure CLI via SSH

Telnet, SNMPv3, SFTP

NETCONF/YANG management interface

Dual Stack IPv4 and IPv6

RADIUS or TACACS+ authentication

Access Control List (ACL)

Configuration backup and restore

Plug and Play Zero Touch Provisioning

DHCP auto-configuration

XML configuration files download via TFTP/SCP

ELECTRICAL

Power Supply

Hot swappable, redundant PS

AC: 100-240 VAC ($\pm 10\%$), 50/60 Hz

DC: 48 VDC (40-60 VDC)

Power consumption: 350W

ETX-2i-100G

High Speed Carrier Ethernet Demarcation and Aggregation

DIMENSIONS

19" enclosure:

Height: 44 mm (3.46")

Width: 440 mm (17.32")

Depth: 400 mm (15.75")

ENVIRONMENTAL

Storage Temperature: -40 to 85°C (-40 to 185°F)

Operating Temperature: 0 to 50°C (32 to 122°F)

Humidity: 5% to 90%, non-condensing

STANDARDS COMPLIANCE

CE 2.0, MEF 6 (E-Line – EPL and EVPL, E-LAN – EPLAN and EVPLAN), MEF 9, MEF10, MEF 14, MEF 20, MEF 36, MEF 46, IEEE 802.3, 802.3u, 802.1D, 802.1Q, 802.1p, 802.3ad, 802.3-2005, 802.1ax, 802.1ag, ITU-T Y.1731, G.8031, G.8262, G.8265, RFC-2544, ITU-T Y.156

Ordering

RECOMMENDED CONFIGURATIONS

ETX-2i-100G/ACR/3QSFP/10SFPP

Redundant AC and/or DC power supply, 1U 19" metal enclosure, 3 QSFP28 Ethernet ports, 10 SFP+ Ethernet ports

SUPPLIED ACCESSORIES

AC power cord

RM-50 HW kit for mounting 19" unit in a 19" rack

OPTIONAL ACCESSORIES

CBL-MUSB-DB9F

Mini-USB cable to connect device to a serial port

ETX-2i-100G-PS/AC

Single AC power supply

ETX-2i-100G-PS/DC

Single DC power supply

RM-53 HW kit for mounting 19" unit in a 19" rack 100mm deep installation

International Headquarters

24 Raoul Wallenberg St., Tel Aviv 6971923, Israel

Tel 972-3-6458181 | Fax 972-3-7604732

Email market@rad.com

North American Headquarters

900 Corporate Drive, Mahwah, NJ 07430, USA

Tel 201-529-1100 | Toll Free: 800-444-7234 | Fax: 201-529-5777

Email market@radusa.com



Your Network's Edge®

www.rad.com

547-101-09/19 (6.7) Specifications are subject to change without prior notice. © 1988–2019 RAD Data Communications Ltd. RAD products/technologies are protected by registered patents. To review specifically which product is covered by which patent, please see ipr.rad.com. The RAD name, logo, logotype, and the product names MiNID, Optimux, Airmux, IPmux, and MiCLK are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.