



## T3

## T3 Multiplexer Module

## GENERAL

## Diagnostics

Remote and local loopbacks on:

- T3 ports (per port)
- T1 ports (per port and per timeslot)

## Indicators

SYNC (green/red):

- Lights in green when the port is active and operating properly
- Lights in red when the port is active and detects a LOS, LOF or AIS alarm indication
- Off: not active or not connected

REM SYNC (yellow): Lights when the port detects loss of remote synchronization

## Power Consumption (max.)

10.4W

## Environment

Operating temperature: -10°C to +55°C

(14°F to 131°F)

Storage temperature: -20°C to +70°C

(-4°F to +160°F)

Humidity: up to 95%, non-condensing

## Ordering

MP-4100M-T3

T3 multiplexer module

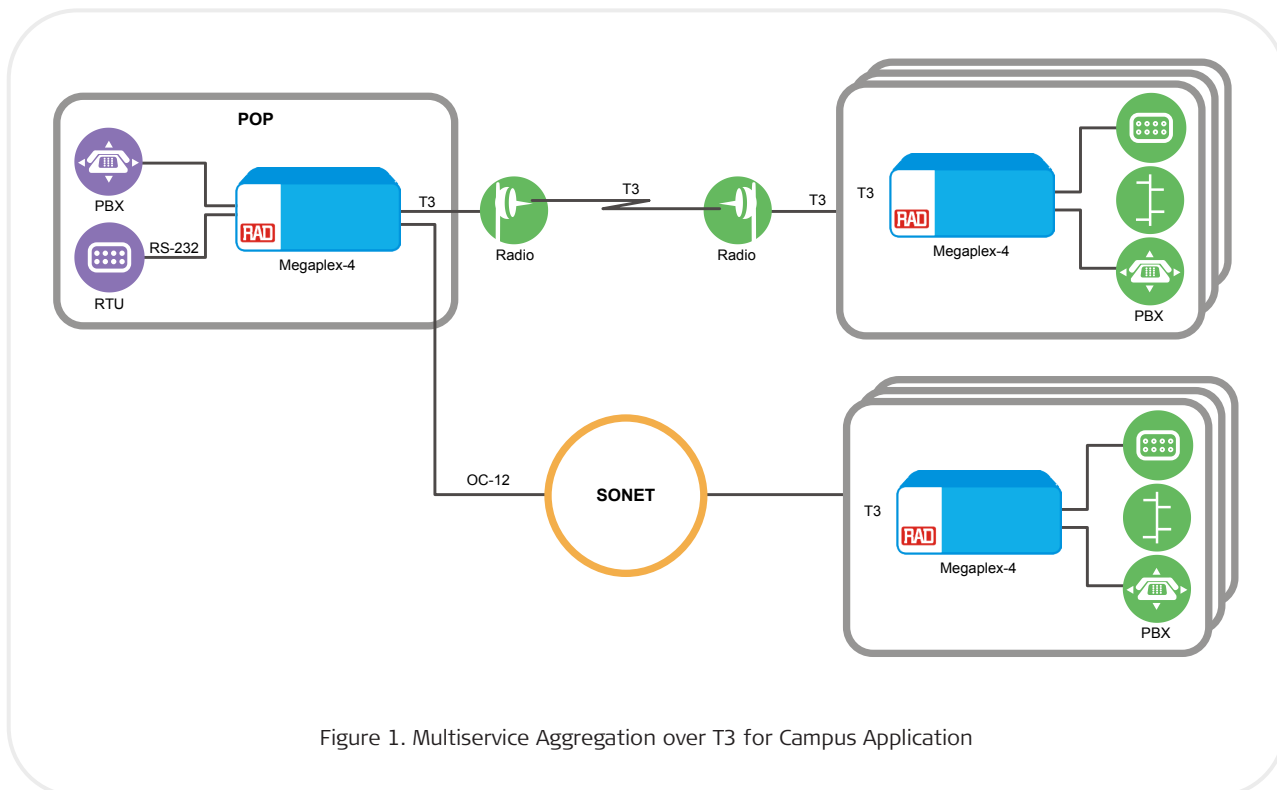


Figure 1. Multiservice Aggregation over T3 for Campus Application

## International Headquarters

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail market@rad.com

## North America Headquarters

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@radusa.com

[www.rad.com](http://www.rad.com)

Order this publication by Catalog No. 805062  
Order from: Cutter Networks Inc Phone: 727-398-5252



[www.bestdatasource.com](http://www.bestdatasource.com)